



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**07.12.2005 Bulletin 2005/49**

(51) Int Cl.7: **A61M 39/02**

(21) Application number: **05253363.5**

(22) Date of filing: **01.06.2005**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**  
 Designated Extension States:  
**AL BA HR LV MK YU**

(72) Inventors:  
 • Comlon, Sean P.  
 Loveland Ohio 45140 (US)  
 • Uth, Joshua R.  
 Mason Ohio 45040 (US)  
 • Chen, How-Lun  
 Cincinnati Ohio 45242 (US)

(30) Priority: **01.06.2004 US 858614**

(71) Applicant: **ETHICON ENDO-SURGERY, INC.**  
 Cincinnati, Ohio 45242 (US)


(74) Representative: **Mercer, Christopher Paul et al**  
**Carpmaels & Ransford,**  
**43-45 Bloomsbury Square**  
**London WC1A 2RA (GB)**

(54) **A surgically implantable injection port having an improved fastener**

(57) An implantable surgical injection port (10) having an undeployed position, and a deployed position wherein it is attached to tissue. The port includes a housing (16) having a closed distal end, a open proximal end and a fluid reservoir therebetween. The port further includes a needle penetrable septum (22) attached to the

housing about the opening. The port even further includes at least one attachment mechanism mounted to the housing at a pivot point along an outer periphery of the housing. The attachment mechanism is an arcuate hook (70) pivotable with respect to the housing, wherein the arcuate hook having a length extending substantially greater than 90° about the pivot point.

**FIG. 2**

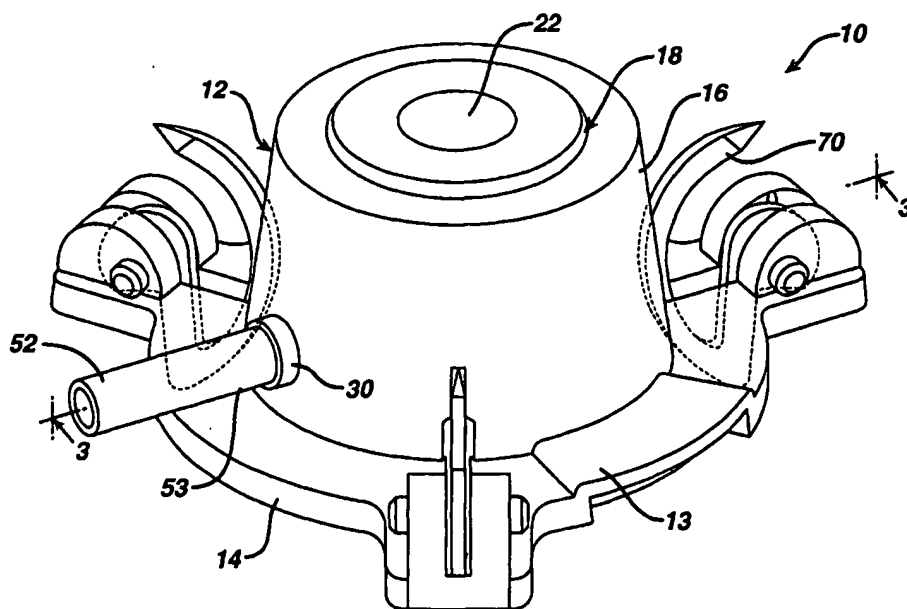

## Description

[0001] This present application is a continuation in part of U.S. Patent Application Serial No. 10/741,785 filed December 19, 2003, which is hereby incorporated herein by reference.

## Field of the Invention

[0002] The present invention has application in conventional endoscopic and open surgical instrumentation as well as application in robotic-assisted surgery. The present invention has even further relation to adjustable surgically implantable bands, such as gastric bands for the treatment of obesity.

## Background of the Invention

[0003] The percentage of the world's population suffering from morbid obesity is steadily increasing. Severely obese persons are susceptible to increased risk of heart disease, stroke, diabetes, pulmonary disease, and accidents. Because of the effect of morbid obesity to the life of the patient, methods of treating morbid obesity are being researched.

[0004] Numerous non-operative therapies for morbid obesity have been tried with virtually no permanent success. Dietary counseling, behavior modification, wiring a patient's jaws shut, and pharmacological methods have all been tried, and failed to correct the condition. Mechanical apparatuses for insertion into the body through non-surgical means, such as the use of gastric balloons to fill the stomach have also been employed in the treatment of the condition. Such devices cannot be employed over a long term, however, as they often cause severe irritation, necessitating their periodic removal and hence interruption of treatment. Thus, the medical community has evolved surgical approaches for treatment of morbid obesity.

[0005] Most surgical procedures for treatment of morbid obesity may generally be classified as either being directed toward the prevention of absorption of food (malabsorption), or restriction of stomach to make the patient feel full (gastric restriction). The most common malabsorption and gastric restriction technique is the gastric bypass. In variations of this technique, the stomach is horizontally divided into two isolated pouches, with the upper pouch having a small food capacity. The upper pouch is connected to the small intestine, or jejunum, through a small stoma, which restricts the processing of food by the greatly reduced useable stomach. Since food bypass much of the intestines, the amount of absorption of food is greatly reduced.

[0006] There are many disadvantages to the above procedure. Typically the above mentioned procedure is performed in an open surgical environment. Current minimally invasive techniques are difficult for surgeons to master, and have many additional drawbacks. Also,

there is a high level of patient uneasiness with the idea of such a drastic procedure which is not easily reversible. In addition, all malabsorption techniques carry ongoing risks and side effects to the patient, including malnutrition and dumping syndrome.

[0007] Consequently, many patients and physicians prefer to undergo a gastric restriction procedure for the treatment of morbid obesity. One of the most common procedures involves the implantation of an adjustable gastric band. Examples of an adjustable gastric band can be found in U.S. Patents 4,592,339 issued to Kuzmak; RE 36176 issued to Kuzmak; 5,226,429 issued to Kuzmak; 6,102,922 issued to Jacobson and 5,601,604 issued to Vincent, all of which are hereby incorporated herein by reference. In accordance with current practice, a gastric band is operatively placed to encircle the stomach. This divides the stomach into two parts with a stoma in-between. An upper portion, or a pouch, which is relatively small, and a lower portion which is relatively large. The small partitioned portion of the stomach effectively becomes the patient's new stomach, requiring very little food to make the patient feel full.

[0008] Once positioned around the stomach, the ends of the gastric band are fastened to one another and the band is held securely in place by folding a portion of the gastric wall over the band and closing the folded tissue with sutures placed therethrough thereby preventing the band from slipping and the encircled stoma from expanding. Gastric bands typically include a flexible substantially non-extensible portion having an expandable, inflatable portion attached thereto. The inflatable portion is in fluid communication with a remote injection site, or port. Injection or removal of an inflation fluid into or from the interior of the inflatable portion is used to adjust the size of the stoma either during or following implantation. By enlarging the stoma, the patient can eat more food without feeling as full, but will not lose weight as fast. By reducing the size of the stoma, the opposite happens. Physicians regularly adjust the size of stoma to adjust the rate of weight loss.

[0009] For most fluid injection ports for the above described bands are attached underneath the skin to the fascia of a patient. Such ports are often provided with suture holes and the port is sutured to the tissue. However, alternative means of attaching the port to the patient, such as using integral hooks, can be used as well. Such other means for attaching the port to a patient are described in commonly assigned and copending U.S. Patent Application Serial Numbers: 10/741,785 filed December 19, 2003; 60/478,763 filed December 19, 2003; 10/741,868 filed December 30, 2003; all of which are hereby incorporated herein by reference.

## Summary of the Invention

[0010] In accordance with the present invention, there is provided an implantable surgical injection port having an undeployed position, and a deployed position where-

in it is attached to tissue. The port includes a housing having a closed distal end, a open proximal end and a fluid reservoir therebetween. The port further includes a needle penetrable septum attached to the housing about the opening. The port even further includes at least one attachment mechanism mounted to the housing at a pivot point along an outer periphery of the housing. The attachment mechanism is an arcuate hook pivotable with respect to the housing, wherein the arcuate hook having a length extending substantially greater than 90° about the pivot point.

Preferably, the hook has a fixed end attached to said housing and a free end.

Preferably the arcuate hook has a length extending substantially at least 180° about said pivot point.

Preferably said housing further includes at least one recessed portion at said distal end thereof for receiving said free end of said attachment mechanism when said port is in its deployed position.

Preferably the free end is sharp.

Preferably the injection port further includes a catheter connection tube attached to said housing and in fluid communication with said reservoir.

Preferably said housing comprises titanium.

Preferably said septum self seals after being punctured by a needle and the needle is withdrawn.

Preferably said septum comprises silicone.

Preferably said injection port includes at least three said attachment mechanisms.

Preferably said attachment mechanisms are equally spaced along said outer periphery.

Preferably said outer periphery of said injection port is adjacent said distal end of said housing.

### Detailed Description of the Drawings

[0011] The novel features of the invention are set forth with particularity in the appended claims. The invention itself, however, both as to organization and methods of operation, together with further objects and advantages thereof, may best be understood by reference to the following description, taken in conjunction with the accompanying drawings in which:

[0012] Figure 1 is a perspective view of a surgically implantable fluid port made in accordance with the present invention, showing the port attached to an adjustable gastric band.

[0013] Figure 2 is a perspective view of a surgically implantable fluid port made in accordance with the present invention.

[0014] Figure 3 is a cross section of the port shown in Figures 1 and 2, taken along line 3-3 in Figure 1.

[0015] Figure 4 is a view similar to that of Figure 3 but showing the fluid port implanted within a patient.

### Detailed Description of the Invention

[0016] Referring now to the drawings wherein like nu-

merals indicate the same elements throughout the views, as stated above there is shown in Figure 1 an adjustable gastric band 1 of the type described in the above mentioned incorporated references. Band 1 is implanted within a body of a patient to surround the stomach 12. The inflatable portion of the band is in fluid communication with injection port 10 via a catheter tube 52. Tube 52 has a proximal end 53 attached to the port 10 and a distal end 55 attached to adjustable gastric band 1. Port 10 can be used for a wide range of devices in the medical field and not only for gastric bands. For example the port can also used for vascular access for drug delivery.

[0017] As seen from Figures 2 and 3, surgically implantable injection port 10 includes a housing 12. Housing 12 can be made from any number of materials including stainless steel, titanium, or polymeric materials. Housing 12 has a distal back portion or closed distal end 14 and a perimeter wall portion 16 extending proximally from the back portion 14 at an angle. Wall portion 16 defines a proximal opening or open proximal end 18, and a fluid reservoir 20 between opening 18 and back portion 14. The port includes a needle penetrable septum 22 attached to the housing about the opening 18 so as to cover the opening and seal the reservoir 20. Septum 22 can be made from any number of materials including silicone. Septum 22 is preferably placed in a proximal enough position such that the depth of the reservoir 20 is sufficient enough to expose the open tip of a needle, such as a Huber needle, so that fluid transfer can take place. Septum 22 is preferably arranged so that it will self seal after being punctured by a needle and the needle is withdrawn. In one embodiment, the septum is made from silicone which is under compression when attached to the housing. Port 10 further includes a catheter tube connection member 30, in fluid communication with reservoir 20.

[0018] As seen from the figures, port 10 one or more attachment mechanisms 70. The figures herein show three attachment mechanisms all substantially identical and equally spaced from each other. Attachment mechanisms 70 are mounted to the housing 12 at a pivot point 80 along an outer periphery 13 of the housing 12. As seen from the figures, attachment mechanisms 70 are arcuate hooks pivotable with respect to the housing. Attachment mechanisms 70 have an arcuate length L extending substantially greater than 90°, and preferably at least 180° about the pivot point. Implantable surgical injection port 10 has an undeployed position, shown as a solid line in Figure 3, and a deployed position, shown as the phantom line in Figure 3 and in Figure 4, wherein the port is attached to tissue. Attachment mechanisms 70 can be made from any number of materials including stainless steel, titanium or absorbable materials such as polyglactin and poliglecaprone.

[0019] Attachment mechanism 70 has a fixed end 72 pivotally attached to the housing 12 at pivot point 80. The design allows a surgeon to use forceps and drive

the fastener through the tissue until the free end 74 rests against the flat 75. In this way the patient is protected from the sharp end of the tip. Attachment mechanism 70 also includes a free end 74 which has a sharp or pointed configuration. Housing 12 further includes at least one recessed portion 15 along its distal end 14. Recessed portion 15 is designed to receive the free end 74 of attachment mechanisms 70 when the port 1 is in its deployed position. This design prevents any exposure of the sharp free end to tissue after the port has been implanted.

**[0020]** The above described 180° hook or attachment mechanisms provide advantages over prior 90° or less hooks. As seen from Figure 4, the above described attachment mechanism allows the hook to engage a greater area of tissue, and allows for two locking points, entry into and then out of the fascia. This provides for better sacrament of the port to the tissue. Further no "sharp" is exposed to the patient. A further advantage of the fastener configuration is that the fastener follows a constant radius when pushing through the tissue. By maintaining a constant radius the fastener never induces a compressive force onto the fascia. This should minimize pain because the fastener is not "compressing or squeezing" nerves.

**[0021]** In practice, the physician would create an incision in the skin 110 of a patient to expose the fascia according to well known surgical techniques. Thereafter, as seen from Figure 4, the port 1 could be placed against the fascia 100 of the patient with the port in its undeployed position. Thereafter, the physician could rotate, manually or otherwise, the attachment mechanism substantially greater than 90° and preferably at least 180° so that the hook enters and then exits the fascia. The design allows a surgeon to use forceps and drive the fastener through the tissue until the free end 74 rests against the flat 75. In this way the patient is protected from the sharp end of the tip. This could be done for each attachment mechanism on the device. Thereafter, the catheter tube 52 would be connected to connection member 30, and the patient is sewn up.

**[0022]** It will become readily apparent to those skilled in the art that the above invention has equally applicability to other types of implantable bands. For example, bands are used for the treatment of fecal incontinence. One such band is described in U.S. Patent 6,461,292 which is hereby incorporated herein by reference. Bands can also be used to treat urinary incontinence. One such band is described in U.S. Patent Application 2003/0105385 which is hereby incorporated herein by reference. Bands can also be used to treat heartburn and/or acid reflux. One such band is described in U.S. Patent 6,470,892 which is hereby incorporated herein by reference. Bands can also be used to treat impotence. One such band is described in U.S. Patent Application 2003/0114729 which is hereby incorporated herein by reference.

**[0023]** While preferred embodiments of the present

invention have been shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art without departing from the invention. For example, as would be apparent to those skilled in the art, the disclosures herein have equal application in robotic-assisted surgery. In addition, it should be understood that every structure described above has a function and such structure can be referred to as a means for performing that function. Accordingly, it is intended that the invention be limited only by the spirit and scope of the appended claims.

## Claims

1. An implantable surgical injection port having an undeployed position, and a deployed position wherein it is attached to tissue, said port comprising:
  - a) a housing having a closed distal end, an open proximal end and a fluid reservoir therebetween;
  - b) a needle penetrable septum attached to said housing about said opening; and
  - c) at least one attachment mechanism mounted to said housing at a pivot point along an outer periphery of said housing, said attachment mechanism comprising an arcuate hook pivotable with respect to said housing, said arcuate hook having a length extending substantially greater than 90° about said pivot point.
2. The injection port of claim 1 wherein said housing includes at least one recessed portion at said distal end thereof for receiving a free end of said attachment mechanism when said port is in its deployed position.
3. The injection port of claim 1 or claim 2, wherein said arcuate hook has a length extending at least 180°.
4. The injection port of claim 1, claim 2 or claim 3, wherein said attachment mechanism includes a sharp free end.
5. The injection port of any one of the preceding claims, further including a catheter connection tube attached to said housing and in fluid communication with said reservoir.
6. The injection port of any one of the preceding claims, wherein said housing comprises titanium.
7. The injection port of any one of the preceding claims, wherein said septum self seals after being punctured by a needle and the needle is withdrawn.

8. The injection port of any one of the preceding claims, wherein said septum comprises silicone.
9. The injection port of any one of the preceding claims, wherein said injection port includes at least three said attachment mechanism. 5
10. The injection port of claim 9 wherein said attachment mechanisms are equally spaced along said outer periphery. 10

15

20

25

30


35

40


45


50

55

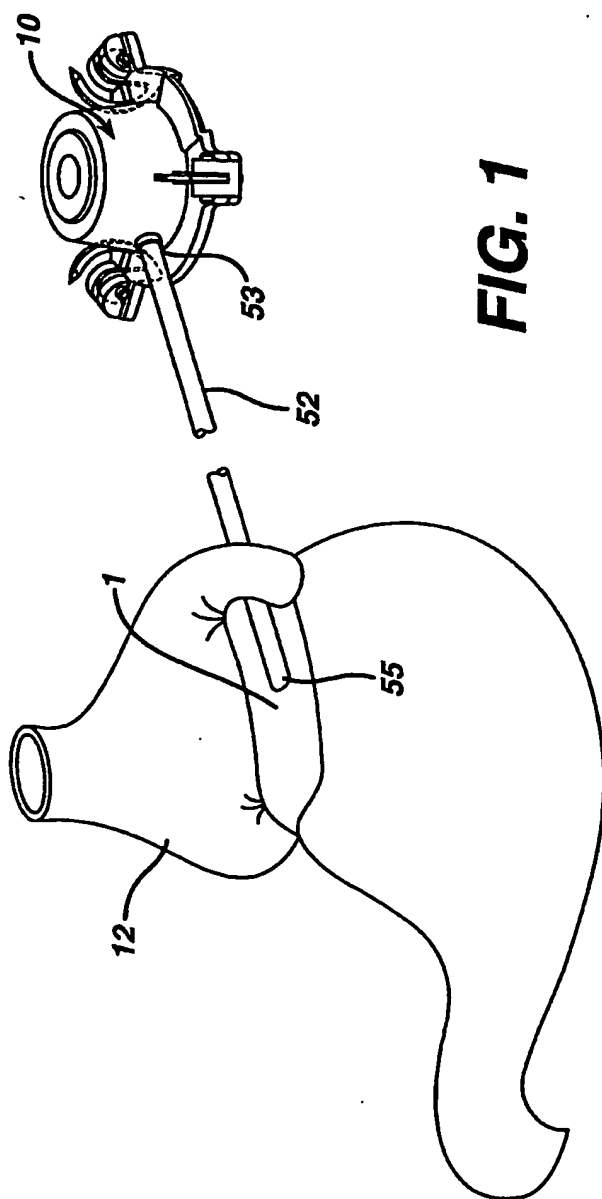


**FIG. 2**

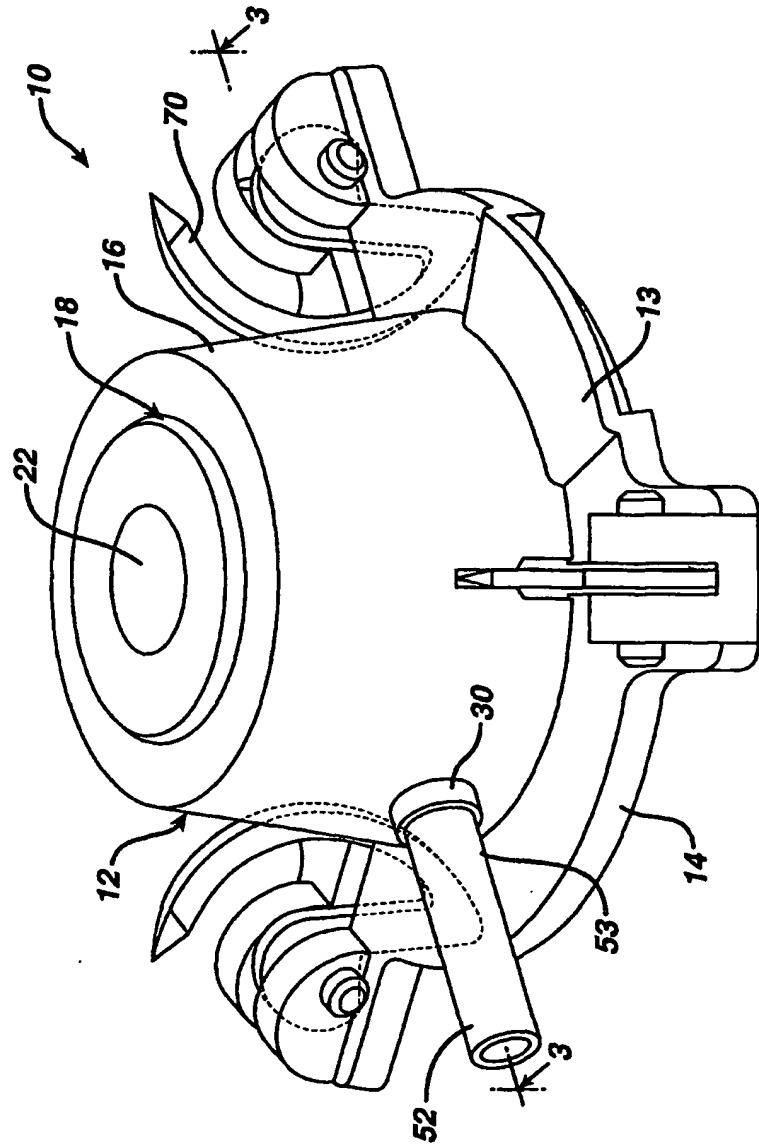

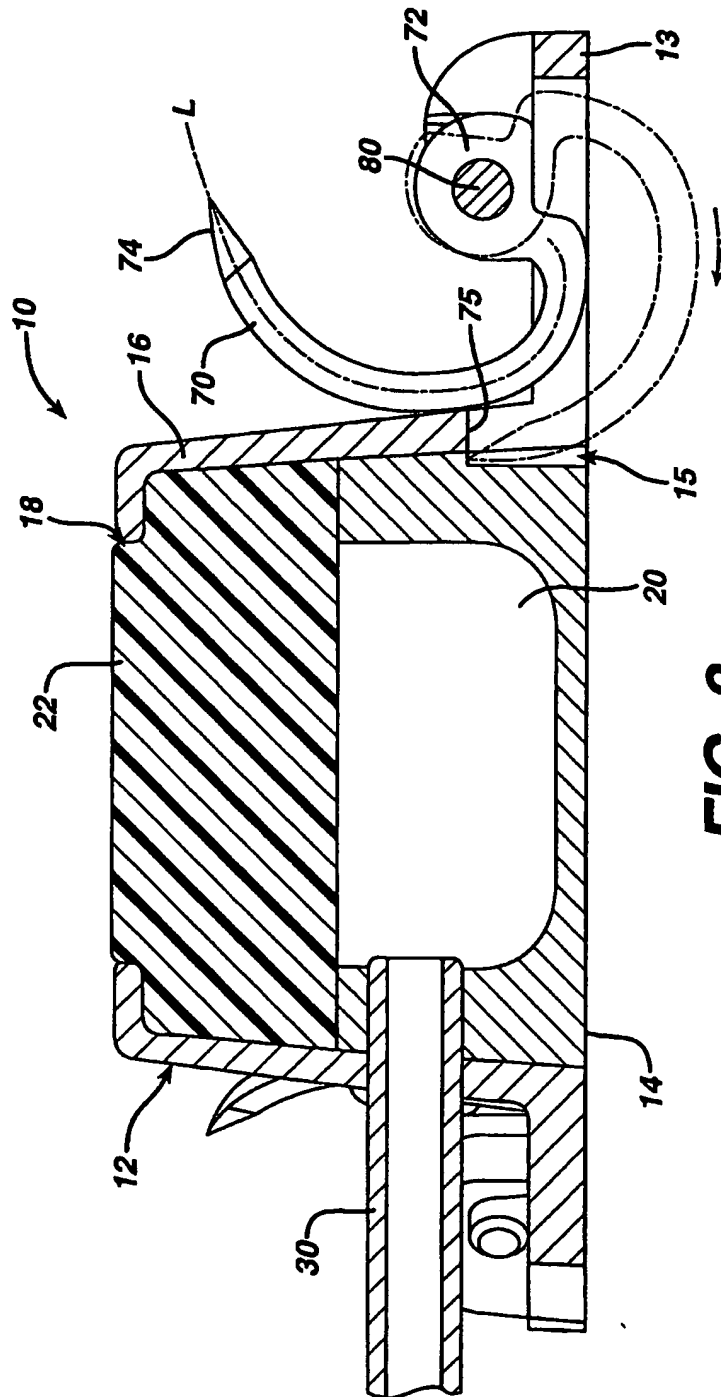



**FIG. 4**

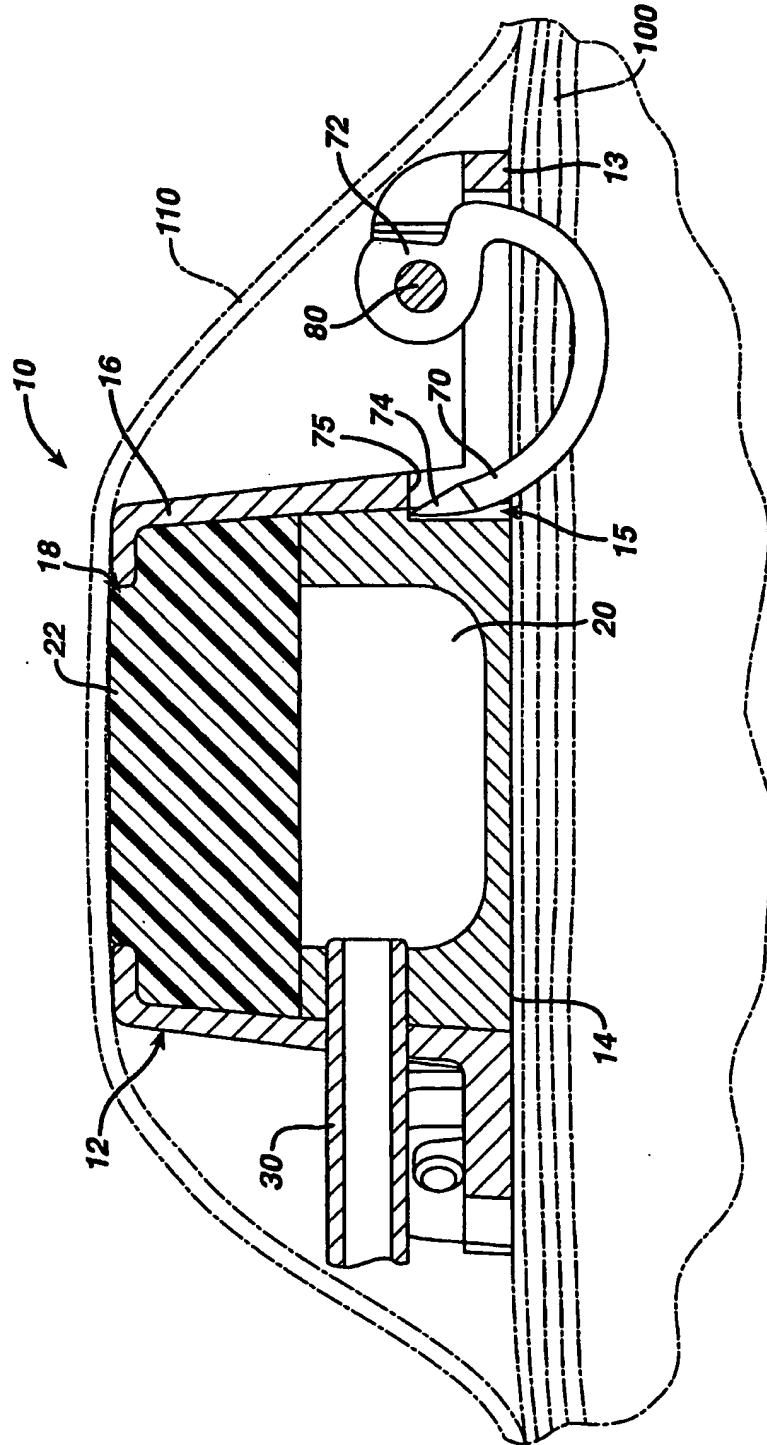



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 05 25 3363

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 207 644 A (STRECKER ERNST P) 4 May 1993 (1993-05-04)	1-5	A61M39/02
Y	* column 11, line 38 - line 65; figures 14-18 *	6-10	
Y	----- DE 197 45 654 A1 (ZENNER, HANS PETER, PROF. DR.MED., 72070 TUEBINGEN, DE; LEHNER, ROLF,) 22 April 1999 (1999-04-22) * column 1, lines 36-65; figures 1-15 *	1-10	
Y	----- US 2003/004520 A1 (BERGERON BRIAN ET AL) 2 January 2003 (2003-01-02) * paragraph [0046] *	1-5	
A	----- EP 1 346 753 A (ETHICON ENDO-SURGERY, INC) 24 September 2003 (2003-09-24) * paragraph [0074]; figures 31,32 *	1-4	
A	----- US 5 976 159 A (BOLDUC LEE R ET AL) 2 November 1999 (1999-11-02) * figures 11A-12G *	1-4	
X,P	----- EP 1 488 824 A (ETHICON ENDO-SURGERY, INC) 22 December 2004 (2004-12-22) * figures 1-34 *	1-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  A61M A61B A61N
The present search report has been drawn up for all claims			
Place of search <b>Munich</b>		Date of completion of the search <b>7 September 2005</b>	Examiner <b>Björklund, A</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 1  
EPO FORM 1503 03 02 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 25 3363

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-09-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5207644	A	04-05-1993	NONE	
DE 19745654	A1	22-04-1999	NONE	
US 2003004520	A1	02-01-2003	CA 2449795 A1 EP 1399202 A1 JP 2004535234 T WO 03002171 A1 US 2003216709 A1 US 2004267238 A1	09-01-2003 24-03-2004 25-11-2004 09-01-2003 20-11-2003 30-12-2004
EP 1346753	A	24-09-2003	US 2003181890 A1 AU 2003202412 A1 BR 0300689 A CA 2423135 A1 CN 1494934 A EP 1346753 A2 JP 2003319945 A US 2005148856 A1	25-09-2003 16-10-2003 08-09-2004 22-09-2003 12-05-2004 24-09-2003 11-11-2003 07-07-2005
US 5976159	A	02-11-1999	US 5695504 A AU 2265297 A WO 9728745 A1 US 2003114867 A1 US 6254615 B1 US 2004073240 A1 US 2004172050 A1 US 2001021858 A1 AU 708815 B2 AU 4978196 A CA 2213580 A1 EP 1266628 A2 EP 0957775 A1 JP 11500642 T US 2005149077 A1 WO 9625886 A1 US 5904697 A US 2002151914 A1 US 2003023251 A1 US 6682541 B1 US 6183486 B1 US 2003065347 A1 US 6171321 B1 US 2003100910 A1 US 6110187 A US 6443965 B1	09-12-1997 28-08-1997 14-08-1997 19-06-2003 03-07-2001 15-04-2004 02-09-2004 13-09-2001 12-08-1999 11-09-1996 29-08-1996 18-12-2002 24-11-1999 19-01-1999 07-07-2005 29-08-1996 18-05-1999 17-10-2002 30-01-2003 27-01-2004 06-02-2001 03-04-2003 09-01-2001 29-05-2003 29-08-2000 03-09-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 25 3363

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-09-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5976159 A		US 2001001122 A1	10-05-2001
		US 2001001825 A1	24-05-2001
		US 5817113 A	06-10-1998
		US 2004167551 A1	26-08-2004
		US 2004186490 A1	23-09-2004
		US 2004199188 A1	07-10-2004
		US 2004199189 A1	07-10-2004
		US 6387105 B1	14-05-2002
		US 2002029049 A1	07-03-2002
		US 2001047179 A1	29-11-2001
		US 2002029050 A1	07-03-2002
		US 2002019643 A1	14-02-2002
		US 2002087175 A1	04-07-2002
		US 2005096675 A1	05-05-2005
		US 2005096676 A1	05-05-2005
EP 1488824 A	22-12-2004	US 2004254537 A1	16-12-2004
		AU 2004202549 A1	06-01-2005
		BR 0402225 A	25-01-2005
		CA 2471185 A1	16-12-2004
		CN 1600281 A	30-03-2005
		EP 1488824 A1	22-12-2004
		JP 2005007171 A	13-01-2005
		US 2005131352 A1	16-06-2005
		US 2004254536 A1	16-12-2004

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82